


[Sign in](#)

Web Results 1 - 93 of about 254 for insert retriev object node logical zone peer "distributed hash table". ((

Did you mean: insert **retrieve** object node **logic** zone peer "distributed hash table"

di: JXTA Distributed Indexing

Each **peer** in the **distributed hash-table** is assigned a responsibility for indexing a range (**zone**) of numbers. In addition, there is a connection topology and ...

di.jxta.org/ - 17k - [Cached](#) - [Similar pages](#)

[PDF] CS603: Distributed Systems

File Format: PDF/Adobe Acrobat - [View as HTML](#)

the **node** S responsible for k. I. **Retrieve object** from **node** S ... Voluntarily leave: **node** transfers its **zone** and the pairs. of keys and data to a neighbor ...

homes.cerias.purdue.edu/~crisn/courses/cs603_Spring_2006/cs603_lect17and18.pdf - [Similar pages](#)

[doc] 1

File Format: Microsoft Word - [View as HTML](#)

The (K, V) pair is then stored at the **node** that owns the **zone** within which point P lies. To **retrieve** the entry corresponding to K, any **node** can apply the ...

www.srdc.metu.edu.tr/webpage/projects/artemis/documents/D3.1.1.3-SOAv1.1_P2P-2.doc - [Similar pages](#)

[PDF] A Scalable Semantic Indexing Framework for Peer-to-Peer ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

distributed hash table (DHT) based network, in a way that seman- ... **node** whose **zone** contains the point. Locating an **object** is reduced ...

hdir2005.isti.cnr.it/camera-ready/7.Chen.pdf - [Similar pages](#)

[PDF] LNCS 2920 - Design of a Secure Distributed Service Directory for ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

stored on the **node** which owns the **zone** within which P lies. To **retrieve** an entry. corresponding to a key K, any **node** can apply the same deterministic hash ...

i30www.ira.uka.de/research/documents/p2p/2004/scan.pdf - [Similar pages](#)

[PDF] BitVault: a Highly Reliable Distributed Data Retention Platform

File Format: PDF/Adobe Acrobat - [View as HTML](#)

key is the handle to **retrieve** an **object**. Each **object** has a ... predecessor in the **logical** space. A **node** whose **zone**. covers an **object's** key (typically the ...

www.cs.utah.edu/classes/cs7460/papers/BitVault.pdf - [Similar pages](#)

[PDF] PinS: Peer to Peer Interrogation and Indexing System

File Format: PDF/Adobe Acrobat

Distributed Hash Table systems. A DHT system splits a key space into zones and assigns. each **zone** to a **peer**. A key is a point in this space and the. **object** ...

doi.ieeecomputersociety.org/10.1109/IDEAS.2004.1319796 - [Similar pages](#)

A Survey of Peer-to-Peer Content Distribution Technologies

To **insert** a new file in the network, the **node** first calculates a binary key for ... **object** location, routing and **distributed hash table** data structures and ...

www.spinellis.gr/pubs/jrnl/2004-ACMCS-p2p/html/AS04.html - 201k -

[Cached](#) - [Similar pages](#)

[PDF] [Untangling the Web from DNS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

tative server for their own domain, and DNS **nodes** need. only serve requests for hosts or from users ... To **retrieve objects** using this kind of URL, the Web ...
nms.csail.mit.edu/papers/sfr-nsdi04.pdf - [Similar pages](#)

[PDF] [A Session-Based Architecture for Internet Mobility](#) Mark Alexander ...

File Format: PDF/Adobe Acrobat

Naming systems use widely varied methods to store and **retrieve** name bindings. ... session between itself and an application running on the mobile **node**. ...
nms.csail.mit.edu/~snoeren/papers/thesis/thesis.pdf - [Similar pages](#)

[PDF] [A Survey and Comparison of Peer-to-Peer Overlay Network Schemes](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

of initiating and routing client requests to **insert** or **retrieve** ... chosen. If FIND **NODE** fails to return a **peer** that is any closer, ...
www.cl.cam.ac.uk/Teaching/2005/AdvSysTop/survey.pdf - [Similar pages](#)

[PDF] [ASCP - -PONS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

connected to the Internet such that each **peer** is capable of ini- tiating and routing client requests to **insert** or **retrieve** files. ...
www.cl.cam.ac.uk/~ekl25/lu.pdf - [Similar pages](#)

[PDF] [Querying the Internet with PIER](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The corresponding key-value pair is then stored at the **node** that owns the **zone** in which. point P lies. To **retrieve** an entry corresponding to a key k, ...
www.mpi-inf.mpg.de/units/ag5/teaching/ws04_05/Proseminar/2005-02-08_Writeup1.pdf - [Similar pages](#)

[PPT] [Architectures and Algorithms for Internet-Scale \(P2P\) Data Management](#)

File Format: Microsoft Powerpoint - [View as HTML](#)

Distributed Hash Table (DHT). similar, but spread across the Internet. Interface. **insert** (key, value); lookup(key). How? Every DHT **node** supports a single ...
db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-final.ppt - [Similar pages](#)

[PDF] [Architectures and Algorithms for Internet-Scale \(P2P\) Data ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **node** is assigned a **zone**. • **Nodes** are identified by **zone** boundaries ... Download one (random) chunk from a storage **peer**, slowly ...
db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-2upbw.pdf - [Similar pages](#)
[[More results from db.cs.berkeley.edu](#)]

[PDF] [Survey of Research towards Robust Peer-to-Peer Networks: Search ...](#)

File Format: PDF/Adobe Acrobat

insert message similarly steps towards the target **node**, ... **Distributed Hash Table**.
Second International Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...
www.cs.umd.edu/projects/p2prg/p2p-overview.pdf - [Similar pages](#)

[PEER-TO-PEER RESEARCH GROUP J.Risson T.Moors Internet Draft ...](#)

The **insert** message similarly steps towards the target **node**, ... Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...
www.ietf.org/internet-drafts/draft-irtf-p2prg-survey-search-00.txt - 215k -
[Cached](#) - [Similar pages](#)

From kash Wed Feb 1 15:58:11 2006 Return-Path: <kash> Received ...
 A **node** could try to join in a = specific **zone** to try and take over a specific ... a **distributed hash table** implementation designed for **peer-to-peer** file ...
www.cs.cornell.edu/People/egs/615/spring06-paper3.txt - 102k - [Cached](#) - [Similar pages](#)

[PDF] Survey of Research towards Robust Peer-to-Peer Networks: Search ...
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
peer. The **insert** message similarly steps towards the target **node**, ... and Efficient Data Management for a **Distributed Hash Table**, Master's Thesis, May 2003. ...
www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf - [Similar pages](#)

[DOC] Professional Report
 File Format: Microsoft Word - [View as HTML](#)
 If the **peer** is being constantly queried, disk I/O's to **retrieve** data from ... This network is split into zones, with each **node** being responsible for a **zone**. ...
homepages.cs.ncl.ac.uk/john.colquhoun/docs/ThesisProposal.doc - [Similar pages](#)

[PDF] Query Processing in P2P Systems
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
 partitioning the **logical** key space among (many) peers ... send message m (eg a. plan) to **peer** responsible for. **zone** containing z ... **Insert** t. using h(t ...
wise.vub.ac.be/ifipwg26/wfw/app/files/685/17/Sattler.pdf - [Similar pages](#)

[PDF] IMMAHN
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
 We use a **distributed hash table** to index **nodes** that store information. ... **object** location and routing substrate for wide-area **peer-to-peer** applications. ...
www.utdallas.edu/~mmohsin/publications/InformationManagement.pdf - [Similar pages](#)

[PDF] Lecture-2 Content Sharing in P2P
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
 Interface. **insert**(key, value). value = **retrieve**(key). Properties. scalable ... multiple **nodes** per **zone** (**peer nodes**) ... Pastry: Scalable, distributed **object** ...
www.iipf.fudan.edu.cn/~zhousg/courses/adc-2006s/Lecture-2%20Content%20Sharing%20in%20P2P.pdf - [Similar pages](#)

[PDF] Distributed algorithms for balanced zone partitioning in content ...
 File Format: PDF/Adobe Acrobat
peer C). Consider an **object** held by a **node** in the system. To realize an efficient management of the ... manner; that is, to **retrieve** an **object** corresponding ...
ieeexplore.ieee.org/iel5/9197/29171/01316117.pdf?arnumber=1316117 - [Similar pages](#)

[PDF] Proceedings of the First Symposium on Networked Systems Design and ...
 File Format: PDF/Adobe Acrobat
 with the **object**. Content providers **insert** an **object's** meta-. data into the infrastructure and ... will **retrieve** content if references are human-unfriendly. ...
db.usenix.org/events/nsdi04/tech/full_papers/walfish/walfish.pdf - [Similar pages](#)

[PDF] Querying the Internet with PIER
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
 In this paper, we present PIER (which stands for "Peer-. to-Peer Information Exchange and ... ing **nodes**. PIER is built on top of a **Distributed Hash Table** ...
www.vldb.org/conf/2003/papers/S11P01.pdf - [Similar pages](#)

[PDF] Fusing Relational Databases and P2P: A Resource Sensitive DHT Overlay
 File Format: PDF/Adobe Acrobat - [View as HTML](#)
 4.3 **Peer Node** Topologies used (see Figure 4.2 for **node** descriptors) which owns the

zone in which P lies. To **retrieve** an item the key is hashed, ...
www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf - [Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

The corresponding key-value pair is then stored at the **node** that owns the **zone** within which the point P lies. To **retrieve** an entry corresponding to key K, ...
edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.doc - [Similar pages](#)

[PDF] [DataGrid](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

logical resource. Subsequent write to this data **object** will write to all data ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...
edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.pdf - [Similar pages](#)

[PDF] [A Peer-to-Peer Filing System for Web Services](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The arriving **node** splits the **zone** in which its personal point ... mechanism, with an interface to **insert** and **retrieve** files from the network. Before the ...
www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf - [Similar pages](#)

[irtf-p2prg-survey-search-00.txt](#)

For an overlay of 10000 **nodes**, they simulated the delay to **retrieve** tuples ... Fault Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** ...
ietfreport.isoc.org/idref/draft-irtf-p2prg-survey-search/ - 238k - [Cached](#) - [Similar pages](#)

[PDF] [UNIVERSITY OF CALIFORNIA Santa Barbara Attribute-based Data Access ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

vide a **distributed hash table** (DHT) semantics where **objects** can be inserted ... **zone**. When querying for an **object**, a **peer** hashes the **object** name to obtain ...
www.cs.ucsb.edu/~dsl/publications/theses/AbhishekGuptaThesis.pdf - [Similar pages](#)

[PDF] [Bulletin of the Technical Committee on March 2005 Vol. 28 No. 1 ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

subset of sensor values and preferences to **retrieve**, and new action settings to ... network and provides facilities for locating the current **peer node** ...
sites.computer.org/debull/A05MAR-CD.pdf - [Similar pages](#)

[PDF] [DDLs: Extending Open Hypermedia Systems into Peer-to-Peer Environments](#)

File Format: PDF/Adobe Acrobat

The servers, upon the receipt of requests, **retrieve** documents and send ... obtain a **zone** from the overall coordinate space, a new CAN **node** first discovers ...
eprints.ecs.soton.ac.uk/10917/01/TestThesis_submit.pdf - [Similar pages](#)

[H:/zz_phd/Phd/phd.dvi](#)

File Format: Unrecognized - [View as HTML](#)

A **node** (**Peer**) in such systems, acquires an identifier based on a cryptographic hash of some ... Koorde: A simple degree optimal **distributed hash table**. ...
www.sics.se/~sameh/download.php?target=pubs/2005/phd/phd.pdf - [Similar pages](#)

[PDF] [FLEXIBLE INFORMATION DISCOVERY WITH GUARANTEES IN DECENTRALIZED ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The overall architecture of Squid is a **distributed hash table** (DHT), ... An **insert** request for **object** A. originated at **node** x will update the pointer lists ...
www.caip.rutgers.edu/TASSL/Thesis/cristina-thesis.pdf - [Similar pages](#)

[PDF] [Digital Library Architectures:](#)

File Format: PDF/Adobe Acrobat

using a DHT (**Distributed Hash Table**) Overlay [2] and having unique IDs for different ... work of **nodes** that can **insert**, store, and **retrieve objects** using ...

ii.umat.at/research/delos_website/ISBN-88-87331-60-X_delos-proceedings.pdf -

[Similar pages](#)

[PDF] UNIVERSITY OF CALIFORNIA SANTA CRUZ DESIGN AND MANAGEMENT OF ...

File Format: PDF/Adobe Acrobat

that can **retrieve** different types of data and allow their sharing. ... Therefore, the benefit of placing an **object** at a certain cache **node** cannot be ...

www.cs.ucsc.edu/~ari/Ari-PhD-Thesis.pdf - [Similar pages](#)

[PDF] Third International Workshop on Distributed Event-Based Systems

File Format: PDF/Adobe Acrobat

ized **Object** Location and Routing for Large-Scale **Peer-to-Peer** Systems. ... **insert node** into clist; //an ordered list wrt the cost metric ...

www-serl.cs.colorado.edu/~carzanig/debs04/debs04proceedings.pdf - [Similar pages](#)

[PDF] Censorship-Resistant Communication over Public Networks

File Format: PDF/Adobe Acrobat - View as HTML

The rewebber network [105] uses onion-encrypted URLs to **retrieve** onion-encrypted ...

Most **distributed hash table** designs assume that single **nodes** join a ...

www.cs.ucl.ac.uk/staff/M.Rogers/transfer-report.pdf - [Similar pages](#)

[PDF] AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK

File Format: PDF/Adobe Acrobat

Retrieve a copy of the state of the **object** from the core replica. ... DHash implements a **distributed hash table** that reliably stores blocks of ...

www.cs.vu.nl/res/theses/bakker_thesis.pdf - [Similar pages](#)

[PDF] An Approach to A Scalable Wide-Area Web Service

File Format: PDF/Adobe Acrobat

gateway) must bind to a GlobeDoc **object** in order to **retrieve** GlobeDoc content. Be- ... use of **peer-to-peer** networks and related **distributed hash table** ...

www.cs.vu.nl/~ikuz/phd/thesis.pdf - [Similar pages](#)

Browse CITRIS Projects

The objective is not just to **retrieve** the most relevant document or text passage ... These proposals support a **Distributed Hash Table** (DHT) functionality in ...

www.citris-uc.org/book/print/1202 - 348k - [Cached](#) - [Similar pages](#)

[PDF] Data Sharing and Information Retrieval in Wide-Area Distributed ...

File Format: PDF/Adobe Acrobat

Distributed Hash Table (DHT) to map a term to a **node** where the inverted list ... and part of the **zone** is given to D. When D wants to **retrieve** the **object** ...

www.cs.rochester.edu/u/www/u/sarrmor/publications/tang-thesis.pdf - [Similar pages](#)

[PDF] Hermes: A Scalable Event-Based Middleware

File Format: PDF/Adobe Acrobat

Data **objects** (events) are published on a **logical** information bus that links pub- ... rendezvous **node** and **retrieve** the authoritative version of the schema. ...

www.eecs.harvard.edu/~prp/doc/prp_thesis.pdf - [Similar pages](#)

[PDF] Digital Library Architectures:

File Format: PDF/Adobe Acrobat

Building a metadata P2P indexing service, using a **Distributed Hash Table** (DHT), will ... work of **nodes** that can **insert**, store, and **retrieve objects** using ...

dbis.cs.unibas.ch/.../D1.2.1%20-%20Proceedings%20I%20on%20Service%

20Architecture,%20P2P%20and%20Grid.pdf - [Similar pages](#)

ATKSI - Glossary of Terms.

A pure **peer-to-peer** network does not have the notion of clients or servers, but only equal **peer nodes** that simultaneously function as both "clients" and ...

www.atksi.com/glossary.htm - 632k - [Cached](#) - [Similar pages](#)

[PDF] Boris Koldehofe DI FCUL TR 06 10 June 2006 Departamento de ...

File Format: PDF/Adobe Acrobat

logical ring, as shown in Figure 1. The **node** responsible for ... tralized **object** location, and routing for large-scale **peer-to-peer** systems. ...

www.di.fc.ul.pt/tech-reports/06-10.pdf - [Similar pages](#)

[PDF] 2005 First Workshop on Secure Network Protocols (NPSec)

File Format: PDF/Adobe Acrobat

Approximate **object**-location and Spam filtering on **peer-to-peer** systems. ... available, through which a **node** is able to **retrieve** the ...

www.ieee-icnp.org/2005/NPsec.pdf - [Similar pages](#)

[PDF] Paper Summaries

File Format: PDF/Adobe Acrobat

If a user cannot find a way to **retrieve** the needed data, then the data is ... PIER relies on a **distributed hash table** (DHT) over participating **nodes** ...

berkeley.intel-research.net/maniatis/bibliography.pdf - [Similar pages](#)

[PDF] D 4.3 Mobility Framework & Mechanisms - Annex

File Format: PDF/Adobe Acrobat

Link disappears (due to shut down of the **peer node** for example) ... process to **insert** location information. When locating an **object**, Tapestry performs the ...

www.ambient-networks.org/publications/

D4_3_Mobility_Framework_&_Mechanisms_Annex_PU.pdf - [Similar pages](#)

[PDF] : a new overlay network based on CAN and Chord

File Format: PDF/Adobe Acrobat - [View as HTML](#)

distributed hash table. Each CAN **node** stores a part (called. a **zone**) of the hash table, ...

Lemma 1: In **logical** overlay, given a **peer** P and a key K, ...

homepage.fudan.edu.cn/~wnqian/publications/IJHPCN.pdf - [Similar pages](#)

[PDF] XXV Auto-ID

File Format: PDF/Adobe Acrobat

can be either a **logical object** which is a collection. of digital information (such as two digits, ... tion **node(s)**. In other words, IP address space is ...

www.wide.ad.jp/project/document/reports/pdf2003/part25.pdf - [Similar pages](#)

[PDF] SNUP -T -PN

File Format: PDF/Adobe Acrobat

peer. For its **zone** the **peer** knows the P2P overlay network topology and the ... As in Chord, in Pastry every **node** and every **object** is described uniquely by ...

tumb1.biblio.tu-muenchen.de/publ/diss/ei/2005/schollmeier.pdf - [Similar pages](#)

[PDF] Project Number: Project Title: Simplicity Deliverable Type: PU ...

File Format: PDF/Adobe Acrobat

Necessary to store and **retrieve** user preferences and other ... A **node** can. **insert** an **object** into PAST, which will be stored in a number of copies into the ...

server.ist-simplicity.org/download.php?OID=164400&FILENAME=D2101-Use%20cases,%20requirements%20and%20... - [Similar pages](#)

[PDF] MoSAIC: Mobile System Availability Integrity and Confidentiality

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When a reader wishes to **retrieve** a document from the servnet, he ... **object** location and routing for large-scale **peer-to-peer** systems. ...

www2.laas.fr/mosaic/documents/MoSAIC-report-20060703.pdf - [Similar pages](#)

[Digital Commons: Browse by Resource Type](#)

Abstract: A **peer-to-peer** (p2p) **distributed hash table** (DHT) system allows ... and fail silently (or leave), as well as to **insert** and **retrieve** les (**objects**). ...

digitalcom.thei3p.org/library/browse_by_type.html?type-id=1001 - 845k -

[Cached](#) - [Similar pages](#)

[PDF] [SoS: Self-organizing Substrates](#)

File Format: PDF/Adobe Acrobat

To **retrieve** an **object** a query to search the **object** is ... A Query-Adaptive Partial

Distributed Hash Table for **Peer-** to-**Peer** Systems. ...

lsirpeople.epfl.ch/datta/ThesisDraft/Thesis.pdf - [Similar pages](#)

[PDF] [Decentralized Object Location and Routing: A New Networking ...](#)

File Format: PDF/Adobe Acrobat

OceanStore **node** should be able to locate and **retrieve** a file replica if such a ... The

Distributed Hash Table (DHT) API is a simple and well understood ...

oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf - [Similar pages](#)

[Multiplex communications patents 200506](#)

A **node** and four IP-STPs belong to a **logical** network A identified by a ... **Peer-to-peer** system and method with prefix-based **distributed hash table**: An ...

www.freshpatents.com/Multiplex-communications-dt200506ntc370.php - 423k -

[Cached](#) - [Similar pages](#)

[PDF] [EFFECTIVE BOOTSTRAPPING OF PEER-TO-PEER NETWORKS OVER MOBILE AD ...](#)

File Format: PDF/Adobe Acrobat

Insert function stores a (key, value) pair at the **node** responsible for the key. Lookup function returns value. associated with a key from a **peer**. ...

etd.lsu.edu/docs/available/etd-07132006-055232/unrestricted/Dissertation.pdf -

[Similar pages](#)

00:00:00 --- log: started lisp/06.02.10 00:00:11 <cliini> Ah, it ...

I can't think of a sane behavior for user **objects**, though. ... 18:38:05 <papasi> i was wondering if i can **retrieve** that same information from lisp 18:38:20 ...

tunes.org/~neff/logs/lisp/06.02.10 - 191k - [Cached](#) - [Similar pages](#)

[PDF] [A Distributed Publish/Subscribe Notification Service for Pervasive ...](#)

File Format: PDF/Adobe Acrobat

ical space and computing **nodes** is softend. Physical **objects** can serve ... on top of a **distributed hash table**; the common data structure for **peer-to-peer** ...

elib.tu-darmstadt.de/diss/000519/thesisFinal.pdf - [Similar pages](#)

[PDF] [D3.1.1: State of the Art and Technology Watching Plan](#)

File Format: PDF/Adobe Acrobat

zone into two equal parts and assigns one of the halves to the new **node**. ... know what we want to **retrieve** and which **peer** is able to provide that ...

www.brickcommunity.org/discussion_area/reports/D311-StateOfTheArt.pdf/download -

[Similar pages](#)

[PDF] [Query Evaluation Techniques for Data Integration Systems](#)

File Format: PDF/Adobe Acrobat

into **distributed hash table**-based approaches and techniques based on distributed rout- ... torus), where each **node** owns a distinct **zone**. ... **insert** c into C ...

www.opus-bayern.de/uni-passau/volltexte/2004/40/pdf/QETechniquesForDISystems.pdf - [Similar pages](#)

[PDF] [Certified by.....](#)

File Format: PDF/Adobe Acrobat

SFR uses a **distributed hash table** (DHT) to map semantic-free 160-bit strings, ... To **retrieve objects** using this kind of URL, the Web browser uses the SFR ...
<https://dspace.mit.edu/bitstream/1721.1/28733/1/59667380.pdf> - [Similar pages](#)

[PDF] [Designs and Analyses in Structured Peer-to-Peer Systems](#)

File Format: PDF/Adobe Acrobat

11 wants to **insert** a new item with id 8, the lookup is forwarded to **node** ... optimal **distributed hash table**. In 2nd International Workshop on **Peer-** ...
eprints.sics.se/163/01/phd.pdf - [Similar pages](#)

[PDF] [The Host Identity Protocol](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When a **peer node** receives a LOCATOR parameter it will verify the reachability of ...
 OpenDHT is a public accessible **Distributed Hash Table** (DHT) service. ...
kom.aau.dk/group/05gr680/report/report.pdf - [Similar pages](#)

[FreeBSD Ports Collection Index](#)

dbtool-1.6_1 -- Store and **retrieve** data in a key/value format in a hash database ... p5-
 DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...
www.freebsd.org/ports/master-index.html - [Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

Each CAN **node** stores a chunk (**zone**) of the entire hash table and holds information about a small number of "adjacent" zones in the table. Requests to **insert** ...
eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/FirstYearDeliverables/d2.1/D2.1-v3.2.doc - [Similar pages](#)

[PDF] [Better Anonymous Communications](#)

File Format: PDF/Adobe Acrobat

dynamic nature of **peer-to-peer** networks, and the volatility of **nodes**. On ... The request phase is then used by Alice to **retrieve** her email from the ...
freehaven.net/anonbib/cache/george-thesis.pdf - [Similar pages](#)

[PDF] [NCCR: 4 Progress Report – Shortened version](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

describe services provided by the **nodes** in a **peer to peer** system. ... Distributed Component **Object Model**. DHT. **Distributed Hash Table** ...
www.mics.org/Annexes/report-y4-short.pdf - [Similar pages](#)

[PDF] [AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK](#)

File Format: PDF/Adobe Acrobat

tributed **object** as a **logical** unit that is physically distributed over multiple ... DHash implements a **distributed hash table** that reliably stores blocks of ...
globule.cs.vu.nl/~arno/Publications/dissertation.pdf - [Similar pages](#)

[PDF] [Proceedings](#)

File Format: PDF/Adobe Acrobat

When a **peer** wants to **insert** a new **object**, it first consults its local AST, ... neighbors (or **logical** neighbors). The domain of a **node** includes all its ...
people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf - [Similar pages](#)

[Rejstřík kolekce portů FreeBSD](#)

biosfont-1.0 - Kernel module to **retrieve** bitmap fonts from BIOS memory ... p5-DateTime-TimeZone-0.46 - Time **zone object** base class and factory ...
www.freebsd.cz/cs/ports/master-index.html - [Similar pages](#)

Current Internet-Drafts This summary sheet provides a short ...

A number of DHT (**Distributed Hash Table**) P2P protocols that solve some similar ...
 managed **objects** for information related to a Fibre Channel **Zone** Server. ...
free.vlsm.org/ID/1id-abstracts.txt - [Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.40 -- Time **zone object** base class and factory ...
freebsd.plig.org/ports/master-index.html - [Similar pages](#)

[PDF] Architecture, protocols and services

File Format: PDF/Adobe Acrobat

Objects in the Fresnel **zone** cause diffraction and hence ... **distributed hash table** (DHT), in which **nodes** are assigned a unique pseudo-random identifier that ...
cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN_Deliverable_D5.pdf - [Similar pages](#)

[PDF] NIRA: A New Internet Routing Architecture

File Format: PDF/Adobe Acrobat

(NRLS) that facilitates a sender to **retrieve** a destination's route ... based on the distances of these **nodes** to **node** m in the **logical** geometry structure. ...
www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf - [Similar pages](#)

[PDF] NASA/IEEE MSST 2004 Twelfth NASAGoddard Conference on Mass Storage ...

File Format: PDF/Adobe Acrobat

a **zone**, with its own metadata catalog managing the **logical** name spaces ... **retrieve** the stripe data from the relevant **nodes** before generating the parity. ...
ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020_2004117345.pdf - [Similar pages](#)

FreeBSD Ports Collection Index

biosfont-1.0 -- Kernel module to **retrieve** bitmap fonts from BIOS memory ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...
www.ca.freebsd.org/ports/master-index.html - [Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...
www.fi.freebsd.org/ports/master-index.html - [Similar pages](#)

FreeBSD Ports Collection — 覽 - [Translate this page]

jigdo-0.7.3 -- A utility used to **retrieve** very large files over the Internet ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...
www.fi.freebsd.org/ja/ports/master-index.html - [Similar pages](#)

Software :: Betas.Intercom.Net :: News and betas from a different ...

eXeem™ is a brand new **Peer-To-Peer** program, which is based on the BitTorrent idea. eXeem™ eliminates the need for trackers as **nodes** in the program will be ...
betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1 - [Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.10c -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.36 -- Time **zone object** base class and factory ...
www.pl.freebsd.org/ports/master-index.html - [Similar pages](#)

From nhodgson at bigpond.net.au Sun Aug 1 00:27:40 2004 From ...

Needs: - high redundancy - high probability of being able to **retrieve** data even if (say) 30% of **nodes** are down - pure-python implementation - **peer to peer** ...
mail.python.org/pipermail/python-list/2004-August.txt - [Similar pages](#)

[PDF] A Session-Based Architecture for Internet Mobility Mark Alexander ...

File Format: PDF/Adobe Acrobat

send packets destined for a mobile **node** to its home address on its home network, ...

Naming systems use widely varied methods to store and **retrieve** name ...

nms.lcs.mit.edu/papers/thesis_snoeren.pdf - [Similar pages](#)

RPM shipped by Mandriva

DNSSEC-Walker-3.5-3mdv2007.0.noarch, **Retrieve** a DNS **zone** using NXT traversal ...

Module to access the Open **Distributed Hash Table** (Open DHT) ...

rpmfind.net/linux/RPM/mandriva/devel/cooker/amd64/media/contrib/Mandriva.html -

[Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-

DateTime-TimeZone-0.42 -- Time **zone object** base class and factory ...

www2.de.freebsd.org/ports/master-index.html - [Similar pages](#)

Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

dht - **distributed hash table** - se distribuerad kondensattabell. fuzzy **logic** - graderad

logik, mjuk logik - logiskt system som hanterar mellanlägen ...

cstjanster.idg.se/sprakwebben/ord.asp?ord=ord - [Similar pages](#)

Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

blob - binary large **object**. En mycket stor fil, till exempel en bild, videosnutt eller ... dht -

distributed hash table - se distribuerad kondensattabell. ...

cstjanster.idg.se/sprakwebben/ord.asp?ord=OR - [Similar pages](#)

FreeBSD Ports Collection 一覽 - [Translate this page]

p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ... p5-Net-

OpenDHT-0.33 -- Access the Open **Distributed Hash Table** (Open DHT) ...

www.de.freebsd.org/ja/ports/master-index.html - [Similar pages](#)

Get Real: Stowe Boyd's Soapbox

A clever protocol, based on a Kademlia **distributed hash table** or "DHT", allows clients to efficiently store and **retrieve** contact information for peers in a ...

getreal.corante.com/archives/technology/ - [Similar pages](#)


In order to show you the most relevant results, we have omitted some entries very similar to the 93 already displayed.

If you like, you can repeat the search with the omitted results included.

Did you mean to search for: insert **retrieve** object node **logic** zone peer "distributed hash table"

Try your search again on [Google Book Search](#)

See all your photos right in your Sidebar.
Free! [Download Google Desktop](#).

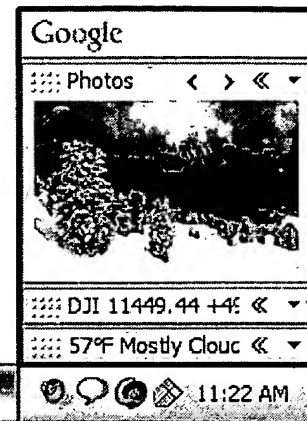


insert retriev object node logical zon

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

[Sign in](#)

Web Results 1 - 100 of about 425 for insert retriev object node logical space peer "distributed hash table"

Did you mean: insert **retrieve** object node logical space peer "distributed hash table"

[PDF] P2P Systems Based on Distributed Hash Table

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A **peer-to-peer** system (P2P) is formed by a large number of **nodes** that ... **objects** in the thesis. Name **space** refers to a set of names in which all names are ...

www.site.uottawa.ca/~mxie/academic/bak/DHT.pdf - [Similar pages](#)

[PDF] A Distributed Persistent Object Store for Scalable Service ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

If the service instance and **Peer-Server** are running on the same **node**, which is often ... TODS provides several ways to **retrieve objects** from the store. ...

www.cs.berkeley.edu/~zf/papers/tods-osreview.pdf - [Similar pages](#)

[PDF] TODS: Cluster Object Storage Platform Designed for Scalable Services

File Format: PDF/Adobe Acrobat - [View as HTML](#)

explicitly **retrieve** every **object** they use and have to call a method to notify the update of an ... **nodes**. All test programs connect to local **Peer Servers** ...

www.cs.berkeley.edu/~zf/papers/zf-jc-tods-ica3pp.pdf - [Similar pages](#)

[More results from www.cs.berkeley.edu]

[PDF] Towards a Common API for Structured Peer-to-Peer Overlays

File Format: PDF/Adobe Acrobat - [View as HTML](#)

and **retrieve** functionality, where the value is always stored at the live overlay **node(s)** to which the key is mapped by the KBR layer. Values can be **objects** ...

pdos.csail.mit.edu/papers/iptps:apis/main.pdf - [Similar pages](#)

[PDF] Chord: A Scalable Peer-to-peer Lookup Protocol for Internet ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

insert and **retrieve** data blocks identified with unique keys. ... The **distributed hash table** uses Chord to identify the **node** responsible for storing a block ...

pdos.csail.mit.edu/chord/papers/paper-ton.pdf - [Similar pages](#)

[More results from pdos.csail.mit.edu]

[PDF] CS603: Distributed Systems

File Format: PDF/Adobe Acrobat - [View as HTML](#)

the **node S** responsible for **k**. I. **Retrieve object** from **node S** ... **successor(k)** = first **node** whose ID is \geq ID of **k** in identifier **space** ...

homes.cerias.purdue.edu/~crisn/courses/cs603_Spring_2006/cs603_lect17and18.pdf -

[Similar pages](#)

[PDF] CLASH: A Protocol for Internet-Scale Utility-Oriented Distributed ...

File Format: PDF/Adobe Acrobat

any leaf **node** of the **logical** tree corresponds to a unique ... distributed **object** location and routing for large-scale **peer-to-peer** systems, ...

doi.ieeecomputersociety.org/10.1109/ICDCS.2004.1281592 - [Similar pages](#)

[PDF] PinS: Peer to Peer Interrogation and Indexing System

File Format: PDF/Adobe Acrobat

Distributed Hash Table systems. A DHT system splits a key **space** into zones and assigns. each zone to a **peer**. A key is a point in this **space** and the. **object** ...
doi.ieeecomputersociety.org/10.1109/IDEAS.2004.1319796 - [Similar pages](#)

[PDF] [Towards a Common API for Structured Peer-to-Peer Overlays](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

bors of the local **node** in the ID **space**. Up to num **node** ... To **insert** a trigger ... **object** location and routing for large-scale **peer-to-peer** systems. In ...
www.cs.rice.edu/~druschel/publications/kbr-api.pdf - [Similar pages](#)

[PDF] [Multicast in DKS\(N, k, f\) Overlay Networks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

8], that **nodes** of a DKS(N, k, f) and **objects** managed by these **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...
dks.sics.se/pub/mcast.pdf - [Similar pages](#)

[PDF] [A Framework For The Understanding, Optimization and Design Of ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

tures [6, 5], that **nodes** of a DKS(N, k, f) and **objects** managed by these **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...
dks.sics.se/pub/lic-kary.pdf - [Similar pages](#)
[[More results from dks.sics.se](#)]

From kash Mon Jan 30 17:57:34 2006 Return-Path: <kash> Received ...

However, Tapestry also associates an epoch with **node/object** association ... are all similar **peer to peer** networks, based on a **Distributed Hash Table (DHT)**. ...
www.cs.cornell.edu/People/egs/615/spring06-paper2.txt - 93k - [Cached](#) - [Similar pages](#)

From kash Wed Feb 1 15:58:11 2006 Return-Path: <kash> Received ...

To route an **object** lookup, a **node** need only calculate a line from itself to the ... The way it works is by splitting the **space** represented as a **logical** ...
www.cs.cornell.edu/People/egs/615/spring06-paper3.txt - 102k - [Cached](#) - [Similar pages](#)
[[More results from www.cs.cornell.edu](#)]

[PDF] [An API for Easy and Reliable Deployment of Structured Peer-to-Peer ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

our **distributed hash table** and decentralized **object** loca- tion and routing implementations. ... coordinate **space** with keys which are mapped to the **node** ...
www.cse.ucsc.edu/~aleung/api.pdf - [Similar pages](#)

[PDF] [MS Word template for A4 size paper](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

space among a set of **peer nodes** (eg, the use of. "virtual servers" in [17]). ... semantics used to store and **retrieve objects** in a DHT. ...
www.research.ibm.com/people/a/archan/icdcs2004-draft.pdf - [Similar pages](#)

[PDF] [Distributed Segment Tree: Support of Range Query and Cover Query ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

nodes (in parallel to shorten the latency) could **retrieve** the ... distributed **object** location and routing for large-scale. **peer-to-peer** systems," in ...
iptps06.cs.ucsb.edu/papers/Zheng-DST06.pdf - [Similar pages](#)

[PDF] [BitVault: a Highly Reliable Distributed Data Retention Platform](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

key is the handle to **retrieve** an **object**. Each **object** has a ... predecessor in the **logical space**. A **node** whose zone. covers an **object's** key (typically the ...
www.cs.utah.edu/classes/cs7460/papers/BitVault.pdf - [Similar pages](#)

[PDF] Data-Centric Storage in Sensornets with GHT, A Geographic Hash TableFile Format: PDF/Adobe Acrobat - [View as HTML](#)data **object** is associated with a key and each **node** in the ... because neighbors in the DHT **logical** identifier **space** may be ...www.isi.edu/div7/publication_files/data_centric_storage.pdf - [Similar pages](#)[PDF] Supporting efficient keyword-based file search in peer-to-peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)**node** information in the **logical** ring and forwards the message. to the next **node**. ... **object** address and routing for large-scale **peer-to-peer** systems," ...www.fulton.asu.edu/embedded/temp/other/ryu.pdf - [Similar pages](#)[PDF] Induced Churn as Shelter from Routing-Table PoisoningFile Format: PDF/Adobe Acrobat - [View as HTML](#)ing a neighborhood of the **logical** overlay **space** collectively. to decide the order of **peer** ... **object** location and routing for large-scale **peer-to-peer** sys- ...www.isoc.org/isoc/conferences/ndss/06/proceedings/html/2006/papers/churn_as_shelter.pdf - [Similar pages](#)[doc] 1File Format: Microsoft Word - [View as HTML](#)It essentially pools unused disk **space** in **peer** computers to create a collaborative ... To **retrieve** the entry corresponding to K, any **node** can apply the same ...www.srdc.metu.edu.tr/webpage/projects/artemis/documents/D3.1.1.3-SOAv1.1_P2P-2.doc -[Similar pages](#)[PDF] GridVine: Building Internet-Scale Semantic Overlay NetworksFile Format: PDF/Adobe Acrobat - [View as HTML](#)**Insert**(key, value). **Retrieve**(key) **Return**(value). **Logical** Layer ... Each **peer** is responsible for some part of. the overall key **space** and maintains additional ...icwww.epfl.ch/publications/documents/IC_TECH_REPORT_200438.pdf - [Similar pages](#)Data overlay, self-organized metadata overlay, and associated ...The resultant partitions define **logical** spaces used to **insert** and **retrieve objects** into and from the **distributed hash table**. A **node** can be said to "own" the ...www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20... - 33k - [Cached](#) - [Similar pages](#)Data overlay, self-organized metadata overlay, and associated ...The DHT **nodes** collectively define an abstract DHT **logical space**spaces used to **insert** and **retrieve objects** into and from the **distributed hash table**www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20... - 72k - Supplemental Result - [Cached](#) - [Similar pages](#)[PDF] A Scalable Semantic Indexing Framework for Peer-to-Peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)to routing to the **node** that hosts the **object**. Routing translates to. traversing from one zone to another in the Cartesian **space**. ...hdr2005.isti.cnr.it/camera-ready/7.Chen.pdf - [Similar pages](#)A Survey of Peer-to-Peer Content Distribution TechnologiesTo **insert** a new file in the network, the **node** first calculates a binary key for ... **object** location, routing and **distributed hash table** data structures and ...www.spinellis.gr/pubs/jrnl/2004-ACMCS-p2p/html/AS04.html - 201k -[Cached](#) - [Similar pages](#)P2P Networks

During the publishing process described previously the roots are used to **insert** location information into the **nodes**. **Objects** stored at regular intervals ...
 ntrg.cs.tcd.ie/undergrad/4ba2.02-03/p9.html - 54k - [Cached](#) - [Similar pages](#)

[PDF] [A Survey and Comparison of Peer-to-Peer Overlay Network Schemes](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

to the set of peers into a large **space** of identifiers. Data **objects** ... of initiating and routing client requests to **insert** or **retrieve** ...

www.cl.cam.ac.uk/Teaching/2005/AdvSysTop/survey.pdf - [Similar pages](#)

[PDF] [ASCP - -PONS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

completely **logical**. The entire coordinate **space** is dynamically ... name to **retrieve** a bootstrap **peer's** IP address, similar to the ...

www.cl.cam.ac.uk/~ekl25/luu.pdf - [Similar pages](#)

[PPT] [P2P lecture](#)

File Format: Microsoft Powerpoint - [View as HTML](#)

Chord **Logical** Structure. m-bit ID **space** (2m IDs), usually m=160. Think of **nodes** as organized in a **logical** ring according to their IDs. ...

webcourse.cs.technion.ac.il/236370/Spring2006/ho/WCFiles/P2P_lecture-CDP.ppt -

[Similar pages](#)

[PDF] [LNCS 2920 - Design of a Secure Distributed Service Directory for ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

this virtual **space** CAN-space. The coordinate **space** is completely **logical** and has ... To **retrieve** an entry, corresponding to a key K, any **node** can apply the ...

i30www.ira.uka.de/research/documents/p2p/2004/scan.pdf - [Similar pages](#)

[PDF] [Deliverable D2.3.1 Requirements for a P2P platform for dynamic ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **node** in the Pastry **peer-to-peer** overlay network is assigned a 128-bit **node** ... The storage component permits to **insert** and **retrieve** files to **nodes** ...

delis.upb.de/deliverables/D2.3.1.pdf - [Similar pages](#)

[PDF] [Mercury: Supporting Scalable Multi-Attribute Range Queries](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

ensures that queries **retrieve** all relevant data items present. in the system. ... the attribute **space** was Zipf-distributed. The **node-range** ...

www.eecs.harvard.edu/~memu/courses/cs264/papers/mercury-sigcomm2004.pdf -

[Similar pages](#)

[PDF] [Hourglass: An Infrastructure for Connecting Sensor Networks and ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

termediate **nodes**. **Nodes** in the circuit can refer to Hourglass ... backing scheme is a **distributed hash table**, one can imagine the ...

www.eecs.harvard.edu/~prp/doc/tr-21-04.pdf - [Similar pages](#)

[PDF] [A Unified Peer-to-Peer Database Framework](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

connects directly to a subset of these **nodes** to query and **retrieve** result sets' ... the theme of **distributed hash table** lookup. Note further that almost no ...

dsd.lbl.gov/~hoschek/publications/jpdc2002-1.pdf - [Similar pages](#)

[PDF] [A UNIFIED PEER-TO-PEER DATABASE FRAMEWORK FOR XQUERIES OVER ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Unified **Peer-to-Peer** Database Framework (UPDF). The related but orthogonal concepts of

(**logical**) link topology and (physical) **node** deploy- ...
 dsd.lbl.gov/~hoschek/publications/phd2002-hoschek.pdf - [Similar pages](#)
[\[More results from dsd.lbl.gov \]](#)

[PDF] [A Decentralized Computational Infrastructure for Grid-Based ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

be associatively accessed by all **peer nodes** without ... uses the tuple **space** abstractions to **retrieve** tasks. and exchange borders. ...

www.caip.rutgers.edu/TASSL/Papers/cometGrid2006.pdf - [Similar pages](#)

[PDF] [FLEXIBLE INFORMATION DISCOVERY WITH GUARANTEES IN DECENTRALIZED ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The overall architecture of Squid is a **distributed hash table** (DHT), ... An **insert** request for **object** A. originated at **node** x will update the pointer lists ...

www.caip.rutgers.edu/TASSL/Thesis/cristina-thesis.pdf - [Similar pages](#)

[PDF] [Query Processing in P2P Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

distributed hash table: provides two operations ... partitioning the **logical** key **space** among (many) peers ... **Insert** t. using h(t) ...

wise.vub.ac.be/ifipwg26/wfw/app/files/685/17/Sattler.pdf - [Similar pages](#)

[PDF] [Querying the Internet with PIER](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

coordinate **space** is completely **logical** and is not related to any physical ... To **retrieve** an entry corresponding to a key k, any **node** can apply the same ...

www.mpi-inf.mpg.de/units/ag5/teaching/ws04_05/Proseminar/2005-02-08_Writeup1.pdf -

[Similar pages](#)

[PDF] [Semantic file Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

peer Internet application. The PAST system is composed of **nodes** connected to the ... initiating and routing clients requests to **insert** or **retrieve** files. ...

etna.int-evry.fr/~bernard/ASR/04-05/projets/systeme-fichiers-semantic/systeme-fichiers-semantic.pdf - [Similar pages](#)

[doc] [Introduction](#)

File Format: Microsoft Word - [View as HTML](#)

2.2.3 Motivation for developing a decentralised **peer to peer** tuple **space** ... This, is handled accordingly, by the **distributed hash table**, if a Chord **node** ...

www.lanacs.ac.uk/ug/kirrage/final.doc - [Similar pages](#)

[PDF] [Caret - A Peer to Peer Computer Aided Requirements Engineering Toolset](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

peer to peer engines, such as Freenet use a **distributed hash table** in order to in- ... The result is that the **peer** attempts to **insert objects** ...

www.lanacs.ac.uk/postgrad/stonea1/caret_downloads/caret.pdf - [Similar pages](#)

[PDF] [Peer-to-Peer Networks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

peer-to-peer overlay network is assigned a 128-bit **node** identifier (nodeID). The nodeID is used to indicate a **node's** position in a circular nodeID **space**, ...

www.cse.fau.edu/~jie/research/publications/Publication_files/handbook-part3.pdf -

[Similar pages](#)

[PDF] [Mercury: Supporting Scalable Multi-Attribute Range Queries](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

This ensures that queries **retrieve** all relevant data items present in. the system. ... This partition is only **logical**, ie, a physical **node** can be part of ...
www.it.uom.gr/mpiweb/peerTopeer/Papers/Mercury2.pdf - [Similar pages](#)

[PDF] [DELOS WP 1 Survey](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

In general, GHT* consists of network **nodes**, peers, that can **insert**, store, and **retrieve objects**. using similarity queries. The GHT* architecture assumes ...
dbis.cs.unibas.ch/delos_website/D1.1.1%20-%20Evaluation%20and%20Comparison%20of%20the%20Service%20Archite... - [Similar pages](#)

[PDF] [Survey of Research towards Robust Peer-to-Peer Networks: Search ...](#)

File Format: PDF/Adobe Acrobat

insert message similarly steps towards the target **node**, ... **Distributed Hash Table**."
 Second International Workshop on. **Peer-to-Peer** Systems (IPTPS 03), ...
www.cs.umd.edu/projects/p2prg/p2p-overview.pdf - [Similar pages](#)

[PDF] [A Self-Service Approach to Scalable Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

in a tree to locate and **retrieve** shared **objects** and perform operations atomically. Another example in. this **space** [24] presents a **distributed hash table** ...
reports-archive.adm.cs.cmu.edu/anon/2006/CMU-CS-06-101.pdf - [Similar pages](#)

[PEER-TO-PEER RESEARCH GROUP J.Risson T.Moors Internet Draft ...](#)

The **insert** message similarly steps towards the target **node**, ... Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...
www.ietf.org/internet-drafts/draft-irtf-p2prg-survey-search-00.txt - 215k -
[Cached](#) - [Similar pages](#)

[SIPPING WG D. Bryan Internet-Draft B. Lowekamp Expires: September ...](#)

Peer-to-Peer (P2P) computing has emerged as a mechanism for completely ... **Nodes** are organized using a **Distributed Hash Table** (DHT) P2P structure based on ...
www.ietf.org/internet-drafts/draft-bryan-sipping-p2p-02.txt - 127k - [Cached](#) - [Similar pages](#)

[PDF] [A distributed, value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

only logarithmic **space** for routing information at each **node**. ... tual servers, thereby hosting multiple **logical** peers per physical **peer** [2]. PAST ...
www.it-c.dk/people/fenne/xmlstore/XMLStore.pdf - [Similar pages](#)

[PDF] [Value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

basically a **distributed hash table** allowing key (value reference) to data (locator) ... The method **insert** inserts a word element **node** into the dictionary. ...
www.it-c.dk/~kasperp/xmlstore/pdf/thesis.pdf - [Similar pages](#)

[PDF] [Pastwatch: a Distributed Version Control System](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

These techniques use **logical** clocks on each. replica to impose a partial order on shared **object** modi-. fications. The systems tag the shared **objects** with ...
project-iris.net/irisbib/papers/pastwatch:nsdi06/paper.pdf - [Similar pages](#)

[PDF] [A Prototype for Certificate Based Authentication in Peer-to-Peer ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Logical identifier: every **node** has a unique ID which is an integer. number. ... Bidding for storage **space** in a **peer-to-peer** data preservation system ...
web.it.kth.se/~rassul/exjobb/rapporter/hamidr.pdf - [Similar pages](#)

[PDF] Survey of Research towards Robust Peer-to-Peer Networks: Search ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

peer. The **insert** message similarly steps towards the target **node**, ... and Efficient Data Management for a **Distributed Hash Table**, Master's Thesis, May 2003. ...
www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf - [Similar pages](#)

[PDF] Efficient Peer-to-Peer Keyword SearchingFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Using this approach, a **node** participates. in a **peer-to-peer** system as several **logical** hosts, propor- tional to its request processing capacity. A **node** that ...
www.cs.utexas.edu/~browne/CS395Tf2002/Papers/Keywordsearch.pdf - [Similar pages](#)

[PDF] A FAULT-TOLERANT HOME-BASED NAMING SERVICE FOR MOBILE AGENTSFile Format: PDF/Adobe Acrobat - [View as HTML](#)

model, a **space** is used to store and **retrieve** messages, called tuples; however, ... to other **nodes**. Furthermore, Chord is able to **insert** new Home Bases or ...
wcl.cs.rpi.edu/theses/fhns/cam_thesis_final.pdf - [Similar pages](#)

[PDF] Mercury: Supporting Scalable Multi-Attribute Range Queries

File Format: PDF/Adobe Acrobat

A large number of **distributed hash table** designs [11,22,23, ... This partition is only **logical**, ie, a physical **node** can. be part of multiple **logical** hubs. ...
portal.acm.org/affiliated/ft_gateway.cfm?id=1015507&type=pdf&coll=ACM&dl=ACM&CFID=1515151... - [Similar pages](#)

[PDF] Scalability and Accuracy in a Large-Scale Network Emulator* Amin ...

File Format: PDF/Adobe Acrobat

Chord [20], a filfly **distributed hash table**. A CFS. prototype was evaluated on 12 **nodes** spread across ... accurately multiplex multiple **logical nodes** onto a ...
portal.acm.org/affiliated/ft_gateway.cfm?id=844154&type=pdf&coll=ACM&dl=guide&CFID=151515... - [Similar pages](#)

[PDF] Linux Peer-to-Peer File Sharing System Technical Report No. CS04-10-00File Format: PDF/Adobe Acrobat - [View as HTML](#)

This network will be designed based on three **object**, **peer**,. storage, and group. ... provides a **distributed hash table** using Chord for block storage. ...
pubs.cs.uct.ac.za/archive/00000174/01/Technical_report.pdf - [Similar pages](#)

[PDF] Using Locality of Reference to Improve Performance of Peer-to-Peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

In order to **retrieve** a file, a user first obtains or calculates. its binary file key. ... 5: **Insert** the **nodes** found as solution of step 4 in the ...
www.dcc.ufmg.br/~virgilio/download/wosp.pdf - [Similar pages](#)

[PDF] Querying the Internet with PIERFile Format: PDF/Adobe Acrobat - [View as HTML](#)

ing **nodes**. PIER is built on top of a **Distributed Hash Table** ... on a **logical**. -dimensional Cartesian coordinate **space**, which ...
www.vldb.org/conf/2003/papers/S11P01.pdf - [Similar pages](#)

[PDF] Scalability and Accuracy in a Large-Scale Network EmulatorFile Format: PDF/Adobe Acrobat - [View as HTML](#)

it processes hardware interrupts to **retrieve** packets. from the network interface. ... accurately multiplex multiple **logical nodes** onto a ...
www.cs.duke.edu/~vahdat/ps/modelnet.pdf - [Similar pages](#)

[PDF] TODS: cluster object storage platform designed for scalable ...

File Format: PDF/Adobe Acrobat

logical object ID or "path" and thus needs to look up the real location of **objects** before ... **nodes**. All test programs connect to local **Peer Servers** and ...
 ieexplore.ieee.org/iel5/8379/26368/01173549.pdf?isnumber=26368&arnumber=1173549 - [Similar pages](#)

[PDF] [Distributed algorithms for balanced zone partitioning in content ...](#)

File Format: PDF/Adobe Acrobat

this coordinate **space** is completely **logical**, and bears no relation to any physical coordinate ... **peer C**). Consider an **object** held by a **node** in the system. ...
 ieexplore.ieee.org/iel5/9197/29171/01316117.pdf?arnumber=1316117 - [Similar pages](#)
 [More results from ieexplore.ieee.org]

[PDF] [Distributed Pattern Matching for P2P Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

(mostly **Distributed Hash Table** (DHT)-based), on the other hand, ... networked **nodes** [6]. However, this **space**-efficiency comes at ...
 bcr2.uwaterloo.ca/~rboutaba/Papers/Conferences/noms2006.pdf - [Similar pages](#)

[PDF] [Proceedings of the First Symposium on Networked Systems Design and ...](#)

File Format: PDF/Adobe Acrobat

with the **object**. Content providers **insert** an **object's** meta- ... about **nodes** nearby in ID **space**. To drive our simulations, we used two days of NLNR ...
 db.usenix.org/events/nsdi04/tech/full_papers/walfish/walfish.pdf - [Similar pages](#)

[PDF] [Information Sources and Sinks in a Grid Environment CoreGRID ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

one of the current state of the art **distributed hash table** algorithms in order ... set to zero, it will **retrieve** the metric only once. **Objects** can install a ...
 www.coregrid.net/mambo/images/stories/TechnicalReports/tr-0022.pdf - [Similar pages](#)

[PDF] [Indexing Heterogeneous Data](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

An exception is [11], which uses a **distributed hash table** (DHT) to ... **Space**. Complexity: Each **node** stores at least $n \cdot c$ fewer **objects** than its parent. ...
 www.cs.washington.edu/homes/suciu/tech-report.pdf - [Similar pages](#)

[PDF] [Lecture-2 Content Sharing in P2P](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Pools unused disk **space** in **peer** computers to ... Calculates file key, sends an **insert** message to **node** with the key and a ... **node J::retrieve(K)** ...
 www.iipf.fudan.edu.cn/~zhousg/courses/adc-2006s/Lecture-2%20Content%20Sharing%20in%20P2P.pdf - [Similar pages](#)

[PDF] [DIPSEA: A MODULAR DISTRIBUTED HASH TABLE](#)

File Format: PDF/Adobe Acrobat

insert, **retrieve** or update an **object**, we first compute the hash-value of its ... In a **peer-to-peer** system, it is difficult for all **nodes** to agree on the ...
 www-db.stanford.edu/~manku/papers/phd-thesis.pdf - [Similar pages](#)

[PDF] [A distributed, value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

and each **peer** contributes resources, such as storage **space** and CPU cycles, to the ... at a **node**, and to **retrieve** a value given a key, respectively. ...
 www.itu.dk/xmlstore/XMLStore.pdf - [Similar pages](#)

[PDF] [i Chord and Symphony: An Examination of Distributed Hash Tables ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

As for the term "overlay networks", these are the **logical** networks that have **nodes**. within an explicit topological **space**, and sustain links with other **nodes** ...
planet.urv.es/planetsim/HaladynaBraunischMALMThesis20060430.pdf - [Similar pages](#)

[PDF] [PEPITO](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

as a **Distributed Hash Table** (DHT) abstraction. A **node** (**Peer**) in such systems, ... DHTs assume that for each item, there is a unique key and to **retrieve** the ...
bigpc.net.pku.edu.cn:8080/paper/new/survey/PEer-to-Peer%20Implementation%20and%20TheOry.pdf - [Similar pages](#)

[PDF] [Tapestry: A Resilient Global-scale Overlay for Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Tapestry provides efficient and scalable routing. of messages directly to **nodes** and **objects** in a large, sparse address **space**. We presented the architecture ...
bigpc.net.pku.edu.cn:8080/paper/new/by%20conference/Others/Tapestry%20A%20resilient%20global-scale%20over... - [Similar pages](#)

[PDF] [Churn resistance in a DHT storing mutable and immutable data](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each Pastry **node** maintains a list of its **logical** neigh- ... tributed **object** location and routing on large-scale. **peer-to-peer** systems. In Proc. ...
www-src.lip6.fr/homepages/Fabio.Picconi/churn.pdf - [Similar pages](#)

[A P2P Approach to SIP Registration and Resource Location](#)

3.1 **Peer-to-Peer** Fundamentals 3.2 **Distributed Hash Table** (DHT) Systems 3.3 Chord 3.4 Issues for P2P Systems 4. Overview 4.1 **Node** Functions and Behavior ...
www.p2psip.org/drafts/draft-bryan-sipping-p2p-02.html - 145k - [Cached](#) - [Similar pages](#)

[PDF] [Kelips: Building an Efficient and Stable P2P DHT through Increased ...](#)

File Format: PDF/Adobe Acrobat

A **peer-to-peer** (p2p) **distributed hash table** (DHT) system. allows hosts to join and fail silently (or leave), as well as to **insert** and. **retrieve** files ...
www.springerlink.com/index/77PGU33GQ6PVYLVW.pdf - [Similar pages](#)

[PDF] [Towards a Common API for Structured Peer-to-Peer Overlays](#)

File Format: PDF/Adobe Acrobat

Participating **nodes** are as-. signed uniform random nodeids from a large identifier **space**. Application-specific. **objects** are assigned unique identifiers ...
www.springerlink.com/index/R9P1GMYEK16KFKLQ.pdf - [Similar pages](#)
 [[More results from www.springerlink.com](#)]

[PDF] [distCVS: A Distributed Peer-to-Peer Versioning File Storage System](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

decentralized **object** location, and routing for large-scale. **peer-to-peer** systems. Lecture Notes in Computer Science,. 2218:329--350, 2001. [7] A. Sotira. ...
cs.bc.edu/bach/2005/05AndrewLogan.pdf - [Similar pages](#)

[PDF] [Architectures and Algorithms for Internet-Scale \(P2P\) Data ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Indirection in **space**. - **Logical** (content-based) IDs, routing to those IDs ... Operation: take key as input; route messages to **node** holding key. **retrieve** (K ...
www.cs.toronto.edu/vldb04/protected/Tutorial4-ho.pdf - [Similar pages](#)

[SIPPING WG D. Bryan Internet-Draft B. Lowekamp Expires: September ...](#)

Nodes are organized using a **Distributed Hash Table** (DHT) structure. ... from the network also will allow a user to **retrieve** their profile from any computer. ...
www.cs.wm.edu/~lowekamp/papers/draft-bryan-sipping-p2p-02.txt - 127k -

[Cached](#) - [Similar pages](#)

[PDF] [D3.2.1 - Detailed Design Specification of Core Bricks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

With respect to the BRICKS P2P networking, we will use terms **peer**, **node** and ... In order to easily **retrieve** an **object**, a key is assigned to it. ...

www.brickcommunity.org/discussion_area/reports/D321-CoreBRICKS.pdf/download -

[Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

This coordinate **space** is completely **logical** and bears no relation to any ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...

edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.doc - [Similar pages](#)

[PDF] [Kelips : Building an Efficient and Stable P2P DHT Through ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A **peer-to-peer** (p2p) **distributed hash table** (DHT). system allows hosts to join and fail silently (or. leave), as well as to **insert** and **retrieve** files (ob- ...

iptps03.cs.berkeley.edu/final-papers/kelips.pdf - [Similar pages](#)

[PDF] [Fusing Relational Databases and P2P: A Resource Sensitive DHT Overlay](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Many content-based routing (**Distributed Hash Table** (DHT)) schemes have been ... 4.3

Peer Node Topologies used (see Figure 4.2 for **node** descriptors)

www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf - [Similar pages](#)

[PDF] [Proceedings of the SIGIR Workshop on Peer-to-Peer Information ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

as a **space** of **objects** with a specific topology (eg a similarity measure or ... documents each leaf **node** is likely to **retrieve**. This is analogous ...

p2pir.is.informatik.uni-duisburg.de/2004/proceedings.pdf - [Similar pages](#)

[PDF] [GPU, Framework Extensions for the Distributed Search Engine and ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

These functions were taken from the program. Deep **Space** Nine [10]. In order to use colormaps one should first define a TColorMap **object**. At the ...

www.tea.ch/gpu/updates/gpu_ext.pdf - [Similar pages](#)

[PDF] [nstitute for ofware esearch](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A structured network uses a **distributed hash table** (DHT) approach to ... Decentralized **Object** Location and Routing for Large-scale **Peer-to-Peer** Systems. ...

www.isr.uci.edu/tech_reports/UCI-ISR-04-6.pdf - [Similar pages](#)

[PDF] [PEER-TO-PEER COMMUNITIES: ARCHITECTURE, INFORMATION AND TRUST ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When **node** X is born, it needs to have one or more **logical** neighbors. ... Unlike overlay networks used by **Distributed Hash Table** (DHT) based **peer-to-peer** ...

www.khambatti.com/mujtaba/ArticlesAndPapers/MujtabaDissertationFINAL.pdf -

[Similar pages](#)

[PDF] [INSTITUT FUR INFORMATIK Managing Trust in a Distributed Network](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The table will **retrieve** a key of a **node** as input and provide the key of a **node** managing ... Kademia is another **peer-to-peer distributed hash table** (DHT), ...

www.mnm-team.org/pub/Diplomarbeiten/else06/PDF-Version/else06.pdf - [Similar pages](#)

[PDF] A Peer-to-Peer Filing System for Web ServicesFile Format: PDF/Adobe Acrobat - [View as HTML](#)

creates a d-dimensional **space** in which each **node** is assigned ownership of a ... mechanism, with an interface to **insert** and **retrieve** files from the network. ... www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf - [Similar pages](#)

[PDF] Distributed Evaluation of Continuous Equi-join Queries over Large ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

one server **nodes**. Clients can **insert** files and pose queries. When a server has no more storage **space** sends data to other servers (split operation) and in ... www.intelligence.tuc.gr/~sidraios/Stratos%20Idreos%20-%20Master%20thesis.pdf - [Similar pages](#)

[PDF] Bulletin of the Technical Committee on March 2005 Vol. 28 No. 1 ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

network and provides facilities for locating the current **peer node** responsible ... In particular, small steps in the **logical** address. **space** usually resulted ... sites.computer.org/debull/A05MAR-CD.pdf - [Similar pages](#)

[PDF] Censorship-Resistant Communication over Public NetworksFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Chord [246] is a **distributed hash table** in which the key **space** can be imagined ... to store and **retrieve** records, and to initialise and maintain each **node's** ... www.cs.ucl.ac.uk/staff/M.Rogers/transfer-report.pdf - [Similar pages](#)

[PDF] How to Exploit Ontologies in Trust NegotiationFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **peer's** IP address is mapped into a **logical** hash **space**. Through random as- ... We use the ATMS **nodes** to represent two types of **objects**. We ... www.l3s.de/~olmedilla/pub/2004/2004_TSRSW04_proceedings.pdf - [Similar pages](#)

[PDF] Digital Library Architectures:

File Format: PDF/Adobe Acrobat

table (DHT) to partition the term **space**, such that every **peer** is responsible for ... work of **nodes** that can **insert**, store, and **retrieve objects** using ... ii.umit.at/research/delos_website/ISBN-88-87331-60-X_delos-proceedings.pdf - [Similar pages](#)

[PDF] DDLS: Extending Open Hypermedia Systems into Peer-to-Peer Environments

File Format: PDF/Adobe Acrobat

The servers, upon the receipt of requests, **retrieve** documents and send ... bution of keys in a uniform **space** in which **node** and **object** identifiers share the ... eprints.ecs.soton.ac.uk/10917/01/TestThesis_submit.pdf - [Similar pages](#)

[PDF] Towards a Common API for Structured Peer-to-Peer OverlaysFile Format: PDF/Adobe Acrobat - [View as HTML](#)

and **retrieve** functionality, where the value is always stored. at the live overlay **node(s)** to which the key is mapped by. the KBR layer. Values can be **objects** ... www.cs.ucsb.edu/~ravenben/classes/papers/apis.pdf - [Similar pages](#)

[PDF] Induced Churn as Shelter from Routing-Table PoisoningFile Format: PDF/Adobe Acrobat - [View as HTML](#)


idea is to run an unpredictable **logical** clock per **peer**. At ev- ery timestep, each **peer** ... the ID **space**. The returned responsible **node** B is added to ... db.cs.berkeley.edu/papers/ndss05-maelstrom.pdf - [Similar pages](#)

Did you mean to search for: insert **retrieve** object node logical space peer "distributed hash table"

Try your search again on [Google Book Search](#)

Google ►
Result Page: 1 2 3 **Next**

See all your photos right in your Sidebar.
Free! [Download Google Desktop](#).

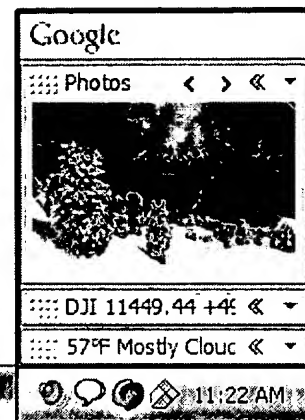


insert retriev object node logical spa

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

[Sign in](#)

Web Results **101 - 200** of about **425** for **insert retriev object node logical space peer "distributed hash tabl**

[PDF] [Keyword Fusion to Support Efficient Keyword-based Search in Peer ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

contains the next **node** information in the **logical** ring and ... **object** address and routing for large-scale **peer-to-peer** systems," in ...

www.public.asu.edu/~kryu1/papers/KF-GP2PC-CR2.pdf - [Similar pages](#)

[PDF] [LNCS 3298 - GridVine: Building Internet-Scale Semantic Overlay ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

structure based on a **distributed hash table** (DHT). GridVine uses two of P- ... By issuing a query from the **peer** using C. 0. ., we could **retrieve** all the 15 ...

lsirpeople.epfl.ch/aberer/PAPERS/ISWC2004.pdf - [Similar pages](#)

[PDF] [Similarity Queries on Structured Data in Structured Overlays](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

peer is responsible for a given region of this **space** and stor- ... $T = \text{Retrieve}(\text{key}(\text{oid}), p);$.

11.: build complete **object** o from T ; 12.: for all $t \in T$ do ...

lsirpeople.epfl.ch/hauswirth/papers/NetDB06.pdf - [Similar pages](#)

[More results from lsirpeople.epfl.ch]

[PDF] [Grid Service Monitor](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

query message did not reach the **peer node** that holds the datasets. ... **retrieve** the required data from its local monitoring information database, ...

www.inf.ed.ac.uk/publications/thesis/online/IT050246.pdf - [Similar pages](#)

[PDF] [Coordinating Access to Computation and Data in Distributed Systems ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

under a unified name **space** with a URL like syntax. A Chirp **object** in ROOT allows ... The cooperative cache is built using a **distributed hash table** [64, 89]. ...

www.cs.wisc.edu/condor/doc/thain-dissertation.pdf - [Similar pages](#)

[PDF] [Third International Workshop on Distributed Event-Based Systems](#)

File Format: PDF/Adobe Acrobat

ized **Object** Location and Routing for Large-Scale **Peer-to- Peer** Systems. ... cess of matching the ID **space** of the event with **nodes'** ID. ...

www-serl.cs.colorado.edu/~carzanig/debs04/debs04proceedings.pdf - [Similar pages](#)

[PDF] [Untangling the Web from DNS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

To **retrieve objects** using this kind of URL, the Web ... about **nodes** nearby in ID **space**. To drive our simulations, we used two days of NLNR ...

nms.csail.mit.edu/papers/sfr-nsdi04.pdf - [Similar pages](#)

[PDF] [A Session-Based Architecture for Internet Mobility Mark Alexander ...](#)

File Format: PDF/Adobe Acrobat

Naming systems use widely varied methods to store and **retrieve** name bindings. ... session between itself and an application running on the mobile **node**. ...

nms.csail.mit.edu/~snoeren/papers/thesis/thesis.pdf - [Similar pages](#)

[PDF] Proceedings of VLDB 2005 PhD WorkshopFile Format: PDF/Adobe Acrobat - [View as HTML](#)is still required to reliably **retrieve** an **object**. Hyper-. CuP is the architecture underlying the ... **peer** lookup service for internet applications. In SIG- ...www.ccs.neu.edu/research/vldb2005workshop/Proceedings-PhDWorkshop.pdf -[Similar pages](#)[PDF] Future Digital Library Management Systems: System Architecture and ...

File Format: PDF/Adobe Acrobat

XPeer is a **logical super-peer** architecture which is well suited for ... **space** wrt which the **objects** of the clusters affected by user interaction are the ...[dbis.cs.unibas.ch/delos_website/D1.1.2%20-%20Workshop%20II%20on%20DL%](http://dbis.cs.unibas.ch/delos_website/D1.1.2%20-%20Workshop%20II%20on%20DL%20Access%20and%20Architecture%20join...)[20Access%20and%20Architecture%20join...](#) - [Similar pages](#)[PPT] Architectures and Algorithms for Internet-Scale (P2P) Data ManagementFile Format: Microsoft Powerpoint - [View as HTML](#)Indirection in **space**. **Logical** (content-based) IDs, routing to those IDs ... **insert**(K1,V1).Operation: take key as input; route messages to **node** holding key ...db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-final.ppt - [Similar pages](#)[PDF] MMAPPs

File Format: PDF/Adobe Acrobat

Request frequency, ie, number of tasks per online **peer node**, **object**, ... separated into bins of varying size to implement a **distributed hash table**. Other ...www.mmapps.info/results/WP2-D5.1-P2P-Overlay-1.0.pdf - [Similar pages](#)[PDF] Tapestry: A Resilient Global-Scale Overlay for Service DeploymentFile Format: PDF/Adobe Acrobat - [View as HTML](#)Abstract—We present Tapestry, a **peer-to-peer** overlay routing ... directly to **nodes** and **objects** in a large, sparse address **space**. ...oceanstore.cs.berkeley.edu/publications/papers/pdf/tapestry_jsac.pdf - [Similar pages](#)[PDF] Decentralized Object Location and Routing: A New Networking ...

File Format: PDF/Adobe Acrobat

OceanStore **node** should be able to locate and **retrieve** a file replica if such a ... from a large identifier **space**. Application-specific **objects** are assigned ...oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf - [Similar pages](#)[PDF] Tapestry: A Resilient Global-scale Overlay for Service DeploymentFile Format: PDF/Adobe Acrobat - [View as HTML](#)storage **space** in the network for faster routing. We investigate this tradeoff by publishing additional. **object** pointers to k backup **nodes** of the next hop of ...bnrg.cs.berkeley.edu/~adj/publications/paper-files/tapestry_jsac.pdf - [Similar pages](#)[PDF] AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK

File Format: PDF/Adobe Acrobat

node into one or more directory subnodes. Each subnode is made responsible for. a specific part of the **object-identifier space** via a special hashing ...www.cs.vu.nl/res/theses/bakker_thesis.pdf - [Similar pages](#)[PDF] An Approach to A Scalable Wide-Area Web Service

File Format: PDF/Adobe Acrobat

gateway) must bind to a GlobeDoc **object** in order to **retrieve** GlobeDoc content. Be- ... use of **peer-to-peer** networks and related **distributed hash table** ...www.cs.vu.nl/~ikuz/phd/thesis.pdf - [Similar pages](#)[PDF] D3.1.2 - Infrastructure Requirements and Overall System Design

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The P2P layer offers functionalities of a DHT (**Distributed Hash Table**) to the upper ...
offers a set of interface classes to **retrieve** (metadata of) **objects** ...
www.brickscmmunity.org/discussion_area/reports/D312-OverallSystemDesign.pdf/download - [Similar pages](#)

[PDF] [Peer to Peer and SPAM in the Internet](#)

File Format: PDF/Adobe Acrobat

space those files take up. So, in connecting, the new **node** ... network can **retrieve objects** directly from each other. Therefore, P2P takes advantage of the ...
www.netlab.tkk.fi/opetus/s38030/F03/Report-p2p-spam-2003.pdf - [Similar pages](#)

[PDF] [DataGrid](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

logical resource. Subsequent write to this data **object** will write to all data ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...
edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.pdf - [Similar pages](#)

[PDF] [Boris Koldehofe DI FCUL TR 06 10 June 2006 Departamento de ...](#)

File Format: PDF/Adobe Acrobat

logical space. DHT **nodes** typically rely upon "long-range ... tralized **object** location, and routing for large-scale **peer-to- peer** systems. ...
www.di.fc.ul.pt/tech-reports/06-10.pdf - [Similar pages](#)

[PDF] [Master's Thesis Search Load Distribution Mechanism for Active P2P ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

exchanged among peers are relayed on **logical** P2P networks, a **peer** behaves as a **node**. For a **peer** to obtain an **object**, it must first find a **peer** that can ...
www.anarg.jp/achievements/web2003/Paper/shi03mastersthesis-SearchLoadDistribution.pdf - [Similar pages](#)

[PDF] [Papers accepted for CGW'04](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

VSS offers standard operations, which let user to store and **retrieve** datafile ... repository is based on the **distributed hash table** (DHT) approach emerging ...
www.cyf-kr.edu.pl/cgw04/contr-papers.pdf - [Similar pages](#)

[PDF] [Chord: a scalable peer-to-peer lookup protocol for internet ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

load on the **logical** root by partitioning **objects** among multiple ... periodically remap the identifier **space** onto **nodes**. Chord also ...
www.cs.rutgers.edu/~tdnguyen/courses/ls-fall-2005/ton-2003-stoica-chord.pdf - [Similar pages](#)

[Browse CITRIS Projects](#)

The objective is not just to **retrieve** the most relevant document or text passage ... These proposals support a **Distributed Hash Table** (DHT) functionality in ...
www.citris-uc.org/book/print/1202 - 348k - [Cached](#) - [Similar pages](#)

[PDF] [PEPITO](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

to design a read/write **peer-to-peer** file system that provides security and access control on top of a **distributed hash table**. 1.1 Overview ...
www.sics.se/pepito/D2.3/D2-3.pdf - [Similar pages](#)

[A Framework For The Understanding, Optimization and Design Of ...](#)

File Format: Unrecognized - [View as HTML](#)

A **node (Peer)** in such systems, acquires an identifier based on a cryptographic ... uniquely

identified by identifiers taken from the same **logical space**. ...
www.sics.se/~sameh/download.php?target=pubs/2003/lic/lic.pdf - [Similar pages](#)
[\[More results from www.sics.se \]](#)

[PDF] [XXV Auto-ID](#)

File Format: PDF/Adobe Acrobat
 information **space**. Here the information **object**. can be either a **logical object** which is a collection ... tion **node(s)**. In other words, IP address **space** is ...
www.wide.ad.jp/project/document/reports/pdf2003/part25.pdf - [Similar pages](#)

[PDF] [Data Sharing and Information Retrieval in Wide-Area Distributed ...](#)

File Format: PDF/Adobe Acrobat
nodes, when varying the number of **objects** to **retrieve** for each ... **Distributed Hash Table** (DHT) to map a term to a **node** where the inverted list ...
www.cs.rochester.edu/u/www/u/sarrmor/publications/tang-thesis.pdf - [Similar pages](#)

[PDF] [Project no.: IST-507102 Project full title: My personal Adaptive ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)
 contains the JXTA **Peer-Id** of all the Master **Nodes** / SMM that are ... (S-CSCF) performs the session control services for the UA and is able to **retrieve** a ...
www.ist-magnet.org/GetAsset.action?contentId=942902&assetId=943008 - [Similar pages](#)

[PDF] [Maelstrom: Churn as Shelter](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)
space, would be admissible instead. As long as a **node** can ... idea is to run an unpredictable **logical** clock per **peer**. At ev- ery time-step, each **peer** ...
www.eecs.berkeley.edu/Pubs/TechRpts/2005/EECS-2005-11.pdf - [Similar pages](#)

[PDF] [QUERY PROCESSING WITH GUARANTEES IN QUERY-CENTRIC NETWORKS](#)

File Format: PDF/Adobe Acrobat
PEER NODE (Alice). (b). <http://alice.youserv.com/yousearch>. CLIENT BROWSER (Bob) ...
 A single **logical** tuple **space** is replicated at N. r. worker hosts. ...
www-db.stanford.edu/~bawa/dissertation/bawa-qpde-05.pdf - [Similar pages](#)

[PDF] [D 5.3 SMART - Final Architectural Design](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)
 the SMART control under the assumption that a mechanism to **retrieve** context ... that for a d-dimensional **space**, the number of **nodes** can grow without ...
www.ambient-networks.org/publications/D5_3_SMART_Final_Architectural_Design_PU.pdf
 - [Similar pages](#)

[PDF] [D 8.3 Ambient Network Management - Proof of Concepts and Evaluations](#)

File Format: PDF/Adobe Acrobat
 Organizing Ambient Control **Space** - An Ambient Network Architecture for Dynamic ... The **Peer-to-Peer** network self-organization framework organizes **nodes** and ...
www.ambient-networks.org/.../D8_3_Ambient_Network_Management_Proof_of_Concepts_&_Evaluations_PU.pdf - [Similar pages](#)
[\[More results from www.ambient-networks.org \]](#)

[PDF] [New Arch: Future Generation Internet Architecture 6/30/00-12/31/03](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)
 independent and application-independent name **space** for **objects** [URI], ... of minimal dependency is that it avoids **logical** loops in restarting **nodes**. ...
www.isi.edu/newarch/iDOCS/final.finalreport.pdf - [Similar pages](#)

[PDF] [Tapestry: A Resilient Global-scale Overlay for Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)
distributed hash table (DHT) or a decentralized **object**. location and routing (DOLR) layer

[3]. ... wait for 15 minutes, and **insert** new **nodes** equal to 50% ...

www.cs.ucsb.edu/~ravenben/classes/290F/papers/tapestry-jsac04.pdf - [Similar pages](#)

[PDF] **"Peer-To-Peer Grid Databases for Web Service Discovery". In: Grid ...**

File Format: PDF/Adobe Acrobat

directly to a subset of these **nodes** to query and **retrieve** result sets as it ... **distributed hash table** lookup. Simple queries for exact match (ie given a ...

doi.wiley.com/10.1002/0470867167.ch19 - [Similar pages](#)

[PDF] **Paper Summaries**

File Format: PDF/Adobe Acrobat

identifier **space**) and given number of therein contained **peer** neighbors. If ... PIER relies on a **distributed hash table** (DHT) over participating **nodes** ...

berkeley.intel-research.net/maniatis/bibliography.pdf - [Similar pages](#)

ATKSI - Glossary of Terms.

Freenet works by pooling the contributed bandwidth and storage **space** of member computers to allow users to anonymously publish or **retrieve** various kinds of ...

www.atksi.com/glossary.htm - 632k - [Cached](#) - [Similar pages](#)

[PDF] **Building a Replicated Data Store using Berkeley DB and the Chord DHT**

File Format: PDF/Adobe Acrobat - [View as HTML](#)

on top of the **distributed hash table** Chord and the database application Berkeley ... a number of server **nodes** that self-organize in a **logical peer-to-peer** ...

www.diva-portal.org/diva/getDocument?urn_nbn_no_ntnu_diva-624-1__fulltext.pdf -

[Similar pages](#)

[PDF] **Designs and Analyses in Structured Peer-to-Peer Systems**

File Format: PDF/Adobe Acrobat

tructures [6, 5], that **nodes** of a DKS(N,k,f) and **objects** managed by these. **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...

www.diva-portal.org/diva/getDocument?urn_nbn_se_kth_diva-264-1__fulltext.pdf -

[Similar pages](#)

[PDF] **Microsoft PowerPoint - s2a-ac-automate.ppt**

File Format: PDF/Adobe Acrobat

provide specialized services such as **peer-to-peer** semantic messaging, ... Overall architecture is a **distributed hash table** (DHT), similar ...

automate.rutgers.edu/tutorials/icac04-tutorial-slides/s2a-ac-automate.pdf - [Similar pages](#)

[PDF] **MSACDAMR**

File Format: PDF/Adobe Acrobat

XML files makes it necessary to store and **retrieve** data efficiently. Unfortunately, the **logical** organi ... **peer** and the others are considered as leaf-**nodes**. ...

www.nii.ac.jp/graduate/thesis/pdf/Jerome_Dr_thesis.pdf - [Similar pages](#)

[PDF] **Dealing with Massive Data: from Parallel I/O to Grid I/O**

File Format: PDF/Adobe Acrobat

various types, that store, **retrieve** and process large quantities of data. ... **peer-to-peer** federation of **logical** name spaces (meta data catalogs) ...

www.cs.dartmouth.edu/pario/hubovsky_dictionary.pdf - [Similar pages](#)

[PDF] **2005 First Workshop on Secure Network Protocols (NPSec)**

File Format: PDF/Adobe Acrobat

Approximate **object**-location and Spam filtering on **peer-to-peer** systems. ... available, through which a **node** is able to **retrieve** the ...

www.ieee-icnp.org/2005/NPsec.pdf - [Similar pages](#)

[PDF] Project Number: Project Title: Simplicity Deliverable Type: PU ...

File Format: PDF/Adobe Acrobat

Necessary to store and **retriev** user preferences and other ... A **node** can. **insert** an **object** into PAST, which will be stored in a number of copies into the ...
 server.ist-simplicity.org/download.php?OID=164400&FILENAME=D2101-Use%20cases,%
 20requirements%20and%20... - [Similar pages](#)

[PDF] MoSAIC: Mobile System Availability Integrity and ConfidentialityFile Format: PDF/Adobe Acrobat - [View as HTML](#)

independently of how much storage **space** each **node** consumes. Consequently, using a DHT ... **object** location and routing for large-scale **peer-to-peer** systems. ...
 www2.laas.fr/mosaic/documents/MoSAIC-report-20060703.pdf - [Similar pages](#)

[PDF] Ανάκτηση Σημασιολογικής Πληροφορίας γιαFile Format: PDF/Adobe Acrobat - [View as HTML](#)

distributed hash table [80]. Atlas **nodes** store RDF(S) data in a Bamboo net- ... **Logical** foundation-. s of **object**-oriented and frame-based languages. ...
 cgi.di.uoa.gr/~iris/miliaraki-thesis.pdf - [Similar pages](#)

[PDF] : a new overlay network based on CAN and ChordFile Format: PDF/Adobe Acrobat - [View as HTML](#)

distributed hash table. Each CAN **node** stores a part (called. a zone) of the hash table, ...
 Lemma 1: In **logical** overlay, given a **peer** P and a key K, ...
 homepage.fudan.edu.cn/~wnqian/publications/IJHPCN.pdf - [Similar pages](#)

[PDF] Carbonara - a semantically searchable distributed repositoryFile Format: PDF/Adobe Acrobat - [View as HTML](#)

In an unstructured **peer-to-peer** network, **nodes** randomly connect to other **nodes** ... of a **distributed hash table**. It can be used as an underlying ...
 www.imit.kth.se/~rassul/exjobb/rapporter/sima-emil.pdf - [Similar pages](#)

Digital Commons: Browse by Resource Type

Abstract: A **peer-to-peer** (p2p) **distributed hash table** (DHT) system allows ... and fail silently (or leave), as well as to **insert** and **retriev** les (**objects**). ...
 digitalcom.thei3p.org/browse_by_type.html?type-id=1001 - 820k - [Cached](#) - [Similar pages](#)

FeedShow: OakLeaf Systems

I used the Data Source Configuration Wizard to generate an **Object** Data Source from the Nwind.Northwind DataContext class, and dragged the Customers **node** ...
 www.feedshow.com/show_items-feed=191d3d273251f9d1f92e66296fa84ee4-OakLeaf%
 20Systems?u= - 498k - [Cached](#) - [Similar pages](#)

[PDF] On representing, linking and distributing food metadata: a ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

form subject-predicate-**object** - each triple could visually be viewed as a **node**-. arc-**node** graph representation. The potential use of URIs for every element ...
 www.informatics.sussex.ac.uk/prizes/doafi.pdf - [Similar pages](#)

[PDF] Grid Tools for the ATLAS ExperimentFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Kademlia is a **Peer-to-peer distributed hash table** (DHT). It minimizes the number of. configuration messages **nodes** must send to learn about each other. ...
 prodrigu.home.cern.ch/prodrigu/docs/thesis.pdf - [Similar pages](#)

[PDF] Automatic Software Upgrades for Distributed Systems Sameer AjmaniFile Format: PDF/Adobe Acrobat - [View as HTML](#)

how to use simulation **objects** to implement a **node**'s types. ... implements a **distributed**

hash table, ie, a key-value store where different servers store the ...
 pmg.csail.mit.edu/~ajmani/papers/phdthesis.pdf - [Similar pages](#)

[PDF] [EFFECTIVE BOOTSTRAPPING OF PEER-TO-PEER NETWORKS OVER MOBILE AD ...](#)

File Format: PDF/Adobe Acrobat

Insert function stores a (key, value) pair at the **node** responsible for the key. Lookup function returns value. associated with a key from a **peer**. ...

etd.lsu.edu/docs/available/etd-07132006-055232/unrestricted/Dissertation.pdf -

[Similar pages](#)

[PDF] [SNUP -T -PN](#)

File Format: PDF/Adobe Acrobat

node/peer-space. **object-space**. identifier-**space**. Figure 2-2 Symbolic illustration of ...

Thus the application can **retrieve** information from these layers and ...

tumb1.biblio.tu-muenchen.de/publ/diss/ei/2005/schollmeier.pdf - [Similar pages](#)

00:00:00 --- log: started lisp/06.02.10 00:00:11 <cliini> Ah, it ...

I've been trying to do some logfile analysis with it and run out of RAM **space** with only

800000 **objects** 13:41:21 <nyef> muhoo: Except that GET is defined to ...

tunes.org/~nef/logs/lisp/06.02.10 - 191k - [Cached](#) - [Similar pages](#)

[irtf-p2prg-survey-search-00.txt](#)

For an overlay of 10000 **nodes**, they simulated the delay to **retrieve** tuples ... Fault Tolerant

Distributed Hash Table, Second Int'l Workshop on **Peer-to-Peer** ...

ietfreport.isoc.org/idref/draft-irtf-p2prg-survey-search/ - 238k - [Cached](#) - [Similar pages](#)

[PDF] [A Distributed Publish/Subscribe Notification Service for Pervasive ...](#)

File Format: PDF/Adobe Acrobat

ical **space** and computing **nodes** is softend. Physical **objects** can serve ... on top of a **distributed hash table**; the common data structure for **peer-to-peer** ...

elib.tu-darmstadt.de/diss/000519/thesisFinal.pdf - [Similar pages](#)

[PDF] [Designs and Analyses in Structured Peer-to-Peer Systems](#)

File Format: PDF/Adobe Acrobat

tures [6, 5], that **nodes** of a DKS(N,k,f) and **objects** managed by these. **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...

eprints.sics.se/163/01/phd.pdf - [Similar pages](#)

[PDF] [Query Evaluation Techniques for Data Integration Systems](#)

File Format: PDF/Adobe Acrobat

(0, 1, 2) so that every **node** has three neighbors. In order to update the SP/SP indices after the modification of the SP/P index of. super-**peer** SP ...

www.opus-bayern.de/uni-passau/volltexte/2004/40/pdf/QETechniquesForDISystems.pdf -

[Similar pages](#)

[PDF] [First Workshop on the Economics of Networked Systems \(NetEcon06\)](#)

File Format: PDF/Adobe Acrobat

our solution is different from **distributed hash table** (DHT)-based. approaches where a **peer** u ... the graph to **insert** self-loops for each **node** with out- ...

www.cs.duke.edu/nicl/netecon06/papers/proceedings.pdf - [Similar pages](#)

[PDF] [Designing P2P Networks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

ing to the **nodes** content, implementing a **distributed hash table** abstraction ... How does a **peer** **retrieve** information about what is happening across the ...

www.cs.uni-paderborn.de/cs/ag-madh/WWW/Teaching/2004WS/Design-P2P/Submissions/Designing%20P2P%20networks.pdf - [Similar pages](#)

[PDF] Certified by.....

File Format: PDF/Adobe Acrobat

To **retrieve objects** using this kind of URL, the Web browser uses the SFR client ... **nodes** nearby in ID **space**. To drive our simulations, we used two days of ...

<https://dspace.mit.edu/bitstream/1721.1/28733/1/59667380.pdf> - [Similar pages](#)

[PDF] UNIVERSITY OF CALIFORNIA SANTA CRUZ DESIGN AND MANAGEMENT OF ...

File Format: PDF/Adobe Acrobat

that can **retrieve** different types of data and allow their sharing. ... Therefore, the benefit of placing an **object** at a certain cache **node** cannot be ...

www.cs.ucsc.edu/~ari/Ari-PhD-Thesis.pdf - [Similar pages](#)

[DOC] Model Cover Page for DeliverablesFile Format: Microsoft Word - [View as HTML](#)

In **peer-to-peer** systems, some of the **nodes** are sometimes elevated to a ... This coordinate **space** is completely **logical** and bears no relation to any physical ...

eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/

FirstYearDeliverables/d2.1/D2.1-v3.2.doc - [Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-Astro-

SpaceTrack-0.022 -- **Retrieve** orbital data from www.space-track.org ...

www.freebsd.org/ports/master-index.html - [Similar pages](#)

Индекс Коллекции Портов FreeBSD

p5-Astro-SpaceTrack-0.022 -- **Retrieve** orbital data from www.space-track.org ... p5-Net-

OpenDHT-0.33 -- Access the Open **Distributed Hash Table** (Open DHT) ...

www.freebsd.org/ru/ports/master-index.html - [Similar pages](#)

[PDF] The Host Identity ProtocolFile Format: PDF/Adobe Acrobat - [View as HTML](#)

When a **peer node** receives a LOCATOR parameter it will verify the reachability of ...

OpenDHT is a public accessible **Distributed Hash Table** (DHT) service. ...

kom.aau.dk/group/05gr680/report/report.pdf - [Similar pages](#)

[PDF] Improving End-to-End Availability Using Overlay Networks David ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

no **peer** proxy was able to **retrieve** the data. TCP RST packets indicate ... using

distributed hash table lookups to route between overlay **nodes**, and using the ...

www.cs.cmu.edu/~dga/papers/andersen-phd-thesis.pdf - [Similar pages](#)

[PDF] Proceedings of the Eighth International Workshop on the Web and ...

File Format: PDF/Adobe Acrobat

tify the **logical** data source to which the **object** belongs. We first ... **peer's** local graph with the additional world **node**. The world **node** has special ...

webdb2005.uhasselt.be/webdb05_eproceedings.pdf - [Similar pages](#)

[PDF] NCCR: 4 Progress Report – Shortened versionFile Format: PDF/Adobe Acrobat - [View as HTML](#)

describe services provided by the **nodes** in a **peer to peer** system. ... Distributed Component **Object Model**. DHT. **Distributed Hash Table** ...

www.mics.org/Annexes/report-y4-short.pdf - [Similar pages](#)

[PDF] ICME 2006

File Format: PDF/Adobe Acrobat

In this paper, we propose an original scheme to **retrieve** among all the target images of a database, those which contain the. same **object** as that represented ...

www.icme2006.org/ICME2006_ProgramGuide.pdf - [Similar pages](#)

[PDF] [Posters and Demos](#)

File Format: PDF/Adobe Acrobat

All ATLAS **nodes**. cooperate to run. the protocols. **insert** RDF triples. receive answers ... with a tag k, users can **retrieve** information **objects** related ...
www.eswc2006.org/technologies/usb/proceedings-posters-demos/eswc2006-poster-demo-proceedings.pdf - [Similar pages](#)

[PDF] [Better Anonymous Communications](#)

File Format: PDF/Adobe Acrobat

dynamic nature of **peer-to-peer** networks, and the volatility of **nodes**. On ... The request phase is then used by Alice to **retrieve** her email from the ...
freehaven.net/anonbib/cache/george-thesis.pdf - [Similar pages](#)

[PDF] [c 2005 by Yi Cui. All rights reserved.](#)

File Format: PDF/Adobe Acrobat

protocol, **distributed hash table**, etc. These mechanisms can effectively capture ... If a **node** can **retrieve** data from m other **nodes**, then following the same ...
cairo.cs.uiuc.edu/publications/paper-files/thesis_yicui.pdf - [Similar pages](#)

[PDF] [page de garde.mdi](#)

File Format: PDF/Adobe Acrobat

reconciliation phase, reconciler **nodes** **retrieve** actions. and constraints from the DHT and produce ... the consistency code separately from the **object logic** ...
chapitres.ieeeefrance.org/computer/download/Actes_cdur2005.pdf - [Similar pages](#)

[PDF] [Distributed Search in Semantic Web Service Discovery](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

where each **peer** contains Local **Node** Repository. These repositories use the Sesame ... Due to the properties of the Chord **distributed hash table**, each **insert** ...
etd.uwaterloo.ca/etd/jiziambi2006.pdf - [Similar pages](#)

[PDF] [Proceedings](#)

File Format: PDF/Adobe Acrobat

When a **peer** wants to **insert** a new **object**, it first consults its local AST, ... neighbors (or **logical** neighbors). The domain of a **node** includes all its ...
people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf - [Similar pages](#)

[Current Internet-Drafts This summary sheet provides a short ...](#)

With the presented extensions the restarting **node** can recover all previously transmitted Path state including the Explicit Route **Object** and the downstream ...
free.vlsm.org/ID/1id-abstracts.txt - [Similar pages](#)

[PDF] [Contract-based Web Service Composition](#)

File Format: PDF/Adobe Acrobat

State **space** containing all possible configurations of the **objects** upon ... In a **peer-to-peer** network. data is stored on the **nodes** and replicated to insure ...
edoc.hu-berlin.de/dissertationen/milanovic-nikola-2006-06-13/PDF/milanovic.pdf - [Similar pages](#)

[PDF] [WSS 2004](#)

File Format: PDF/Adobe Acrobat

Users can control and **retrieve** results remotely and in-. stantly. Computer. Science. Related ... child **node** (A=2, D=2) and **insert** it into the rule tree. ...
www2.cs.uregina.ca/~wss/wss04/wss04.pdf - [Similar pages](#)

[Rejstřík kolekce portů FreeBSD](#)

p5-Astro-SpaceTrack-0.022 - **Retrieve** orbital data from www.space-track.org ... p5-Net-OpenDHT-0.33 - Access the Open **Distributed Hash Table** (Open DHT) ... www.freebsd.cz/cs/ports/master-index.html - [Similar pages](#)

[PDF] [Architecture, protocols and services](#)

File Format: PDF/Adobe Acrobat

distributed hash table (DHT), in which **nodes** are assigned a unique ... each **peer** is arranged in a circular ID **space** and maintains links with its immediate ... cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN_D5.pdf - [Similar pages](#)

[PDF] [NASA/IEEE MSST 2004 Twelfth NASAGoddard Conference on Mass Storage ...](#)

File Format: PDF/Adobe Acrobat

data is done via commands applied to the **logical** name **space**. ... Given an **object** identifier, we need to **retrieve** the **object** from the disk. ...

ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020_2004117345.pdf - [Similar pages](#)

[PDF] [NIRA: A New Internet Routing Architecture](#)

File Format: PDF/Adobe Acrobat

based on the distances of these **nodes** to **node m** in the **logical** geometry ... from the address **space** pf and **insert** the prefix into its downhill table with the ...

www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf - [Similar pages](#)

[PDF] [Multiagent Based Supply Chain Management: A Brief Introduction](#)

File Format: PDF/Adobe Acrobat

The RMF implements a **distributed hash table** - referred to as the P2P ... information to discover the **object** and **retrieve** it from an external **object** ...

www.damas.ift.ulaval.ca/~chaib/MBSCM-pdf/MBSCM-CompleteBOOK.pdf - [Similar pages](#)

[Software :: Betas.Intercom.Net :: News and betas from a different ...](#)

eXeem™ is a brand new **Peer-To-Peer** program, which is based on the BitTorrent idea.

eXeem™ eliminates the need for trackers as **nodes** in the program will be ...

betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1 - [Similar pages](#)

[PDF] [博士學位論文](#)

File Format: PDF/Adobe Acrobat

That is, these P2P systems include a **distributed hash table** component to. distribute **objects** among "**peer nodes**" by choosing random identifiers for the ...

pc01.lib.ntust.edu.tw/ETD-db/ETD-search/getfile?URN=etd-0609105-163717&filename=etd-0609105-163717.pdf - [Similar pages](#)

[From nhodgson at bigpond.net.au Sun Aug 1 00:27:40 2004 From ...](#)

Needs: - high redundancy - high probability of being able to **retrieve** data even if (say) 30% of **nodes** are down - pure-python implementation - **peer to peer** ...

mail.python.org/pipermail/python-list/2004-August.txt - [Similar pages](#)

[PDF] [A Session-Based Architecture for Internet Mobility Mark Alexander ...](#)

File Format: PDF/Adobe Acrobat

send packets destined for a mobile **node** to its home address on its home network, ...

Naming systems use widely varied methods to store and **retrieve** name ...

nms.lcs.mit.edu/papers/thesis_snoeren.pdf - [Similar pages](#)

[FreeBSD Ports Collection Index](#)

p5-XML-Node-0.11 -- Perl5 module to extend and simplify XML::Parser p5-XML-NodeFilter-

0.01 -- A XML::NodeFilter is an **object** that know how to "filter out" ...

www.tr.freebsd.org/ports/master-index.html - [Similar pages](#)

FreeBSD Ports Collection Index

slurp-1.10_2 – Passive NNTP client to **retrieve** Usenet articles from a remote server

slurpie-2.0b – A passwd file cracker (supports distributed **nodes**) ...

www.pl.freebsd.org/ports/master-index.html - [Similar pages](#)

RPM shipped by Mandriva

clusterscripts-client-1.3-1mdk.noarch, Script to setup and **retrieve** information for client

node. Mandriva devel cooker for amd64 ...

rpmfind.net/linux/RPM/mandriva/devel/cooker/amd64/media/contrib/Mandriva.html -

[Similar pages](#)

RPM of Distribution Mandriva Linux

clusterscripts-client-1.3-1mdk.noarch, Script to setup and **retrieve** information for client

node. Mandriva devel 2007.0 for x86_64 ...

rpmfind.net/linux/RPM/mandriva/devel/2007.0/x86_64/media/contrib/Mandriva_Linux.html -

[Similar pages](#)

はてなブックマーク - dannのブックマーク / 2005年10月16日 - [Translate this page]

To convert retrieved XML data into renderable HTML content, rely on the client-side

Document **Object** Model (DOM) to read the XML document **node** tree and c... ..

b.hatena.ne.jp/dann/20051016?mode=detail - [Similar pages](#)

FreeBSD Ports Collection Index

p5-Tree-Binary-0.07 – An **Object** Oriented Binary Tree for Perl p5-Tree-DAG_Node-1.05 –

Super class for representing **nodes** in a tree ...

www2.de.freebsd.org/ports/master-index.html - [Similar pages](#)

Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

dht - **distributed hash table** - se distribuerad kondensattabell. ... fuzzy **logic** - graderad

logik, mjuk logik - logiskt system som hanterar mellanlägen ...


cstjanster.idg.se/sprakwebben/ord.asp?ord=asp - [Similar pages](#)

FreeBSD Ports Collection 一覧 - [Translate this page]

gtkballs-3.1.5_2 – Lines 風のシンプルな **logic** ゲーム (X Window System 用) ... にHTML の

作成をする perl スクリプト htmlsection-1.1 – **Insert** section numbers ...

www.it.freebsd.org/ja/ports/master-index.html - [Similar pages](#)



Result Page: [Previous](#) [1](#) [2](#) [3](#) [Next](#)

[Search within results](#) | [Language Tools](#) | [Search Tips](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

[Sign in](#)[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [Maps](#) [more »](#)

insert retriev object node logical space peer "d

Search

[Advanced Search](#)
[Preferences](#)**Web** Results 201 - 205 of about 425 for insert retriev object node logical space peer "distributed hash tabl[\[PDF\] Effiziente Echtzeit-Kommunikationsdienste durch Einbeziehung von ...](#)

File Format: PDF/Adobe Acrobat

tralized **Object** Location, and Routing for Large-Scale **Peer-to-Peer** Sys- ... Im **Retrieve** FP

Menü können die Daten zu einem bestimmten Raum und Position aus ...

deposit.ddb.de/cgi-bin/dokserv?idn=976136201&


dok_var=d1&dok_ext=pdf&filename=976136201.pdf - [Similar pages](#)[FreeBSD Ports Collection 一覧](#) - [[Translate this page](#)]gtkballs-3.1.5_2 -- Lines 風のシンプルな **logic** ゲーム (X Window System 用) ... p5-Astro-SpaceTrack-0.022 -- **Retrieve** orbital data from [www.space-track.org](#) ...[www.uk.freebsd.org/ja/ports/master-index.html](#) - [Similar pages](#)[Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...](#)blob - binary large **object**. En mycket stor fil, till exempel en bild, videosnutt eller ... dht -**distributed hash table** - se distribuerad kondensattabell. ...cstjanster.idg.se/sprakwebben/ord.asp?ord=OR - [Similar pages](#)[\[PDF\] Thèse Luis Garcés-Erice Un Réseau P2P Hiérarchique: Design et ...](#)

File Format: PDF/Adobe Acrobat

chosen from that portion of the **node ID space**. This implies that during a ... **Peer-to-peer**systems with **Distributed Hash Table** look-up make specific data ...[www.eurecom.fr/~btroup/BPublished/garces_phd.pdf](#) - [Similar pages](#)[Get Real: Stowe Boyd's Soapbox](#)A clever protocol, based on a Kademlia **distributed hash table** or "DHT", allows clients to efficiently store and **retrieve** contact information for peers in a ...[getreal.corante.com/archives/technology/](#) - [Similar pages](#)

In order to show you the most relevant results, we have omitted some entries very similar to the 205 already displayed.

If you like, you can repeat the search with the omitted results included.

Result Page: [Previous](#) [1](#) [2](#) [3](#)

insert retriev object node logical spa Search

[Search within results](#) | [Language Tools](#) | [Search Tips](#)[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)